


GRAVITY 226 SKATE WHEEL CONVEYOR

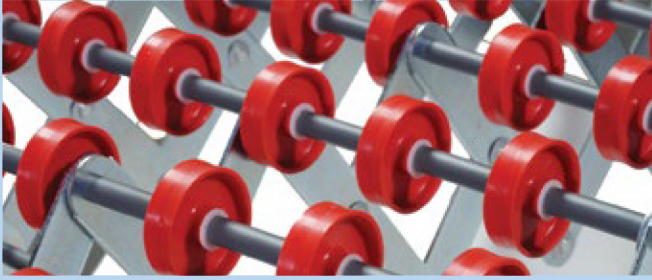

SPECIFICATIONS

14" WIDTHS		18" WIDTHS		24" WIDTHS		LENGTH ADJUSTMENT	
Model #	Leg Sets	Model #	Leg Sets	Model #	Leg Sets	Extended	Contracted
22614008	3	22618008	3	22624008	3	8' 11"	2' 4"
22614012	4	22618012	4	22624012	4	12' 10"	3' 3"
22614016	5	22618016	5	22624016	5	16' 9"	4' 3"
22614020	6	22618020	6	22624020	6	20' 9"	5' 2"
22614024	7	22618024	7	22624024	7	24' 8"	6' 2"
22614028	8	22618028	8	22624028	8	28' 7"	7' 1"
22614032	9	22618032	9	22624032	9	32' 6"	8' 1"
22614036	10	22618036	10	22624036	10	36' 6"	9' 0"
22614040	11	22618040	11	22624040	11	40' 5"	10' 0"
		22618044	12	22624044	12	44' 4"	10' 11"
		22618048	13	22624048	13	48' 3"	11' 11"
		22618052	14	22624052	14	52' 3"	12' 10"
		22618056	15	22624056	15	56' 2"	13' 10"
		22618060	16	22624060	16	60' 1"	14' 9"

6 skate wheels per axle

8 skate wheels per axle

8 skate wheels per axle

With standard 5¼" axle center

All conveyor products can be modified to suit specific design requirements. Please contact our sales representatives for details on sizes or options that are not listed.

STANDARD FEATURES

- Load capacity 226 lbs/ft
- Black poly skate wheels with steel ball bearings
- 5¼" axle centers
- 28" – 44" adjustable conveyor heights using hand knobs to raise or lower the legs
- Heavy duty steel square tubing zinc plated legs
- Welded horizontal leg brace
- Heavy duty 5" x 1½" casters with 2 total lock brake casters on each end
- 11 gauge steel side links assembled using steel pin and retaining ring
- 5/16" Ø axle across the width
- Self-tracking design
- Couplers
- Heavy duty retractable package stop

OPTIONS

- 4" and 3" axle centers
- Additional brake casters
- Additional set of couplers
- Elevations for Adjustable legs
 - 20"-28"
 - 25"-38"
 - 36"-52"
- Steel skate wheels / steel ball bearings OR Red poly skate wheels / nylon bushings

ACCESSORIES

- Curve Guards
- Swing Stick
- T-Junction

TECHNICAL DATA

CONSTRUCTION

All steel construction

LEGS

Zinc plated, heavy duty leg supports
1½" square steel tubing with a welded cross member

SIDE LINKS

Made of 11 gauge steel

WARRANTY

18 month warranty

SERVICES AVAILABLE

- Technical Support
- Application Support
- Hardware Support